


LD-Master Traction

35/65 R 33

Tread	L-5
Star Rating	***
Load / Speed Index	229 A2
Application 1	EM - Loader

Rim*	28.00x33/3.5
Tire type	TL
O-Ring	OR 333T
Art. No.	1296036000
ContiPressureCheck sensor pre-mounted	

*Recommended rim in bold

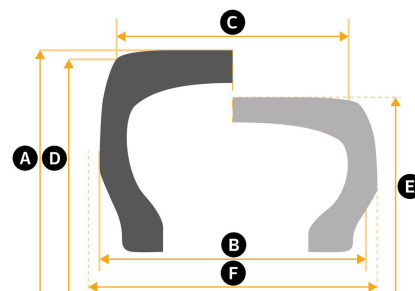

Tire dimensions

Continental Values										
A	Overall diameter	2065 mm	81.3 in	E	Static loaded radius*	1000 mm	39.4 in	Weight (approximate)	[kg]	1130
B	Overall width	891 mm	35.1 in	F	Static loaded width*			Weight (approximate)	[lbs]	2491
C	Tread width	844 mm	33.2 in		Rolling circumference*			Fill volume	[dm³]	
D	Tread edge diameter	2012 mm	79.2 in		TKPH / TMPH			Max distance per hour	[km]	10
	Tread depth	97.0 mm	122/32nd		Minimum dual spacing			Max distance per hour	[mile]	6.2

*at reference load

Tire load capacity

		Tire load capacity per tire at different cold inflation pressures															
		bar	4,00	4,25	4,50	4,75	5,00	5,25	5,50	5,75	6,00	6,25	6,50	7,00	7,50	8,00	8,50
Application & Speed		psi	58	62	65	69	73	76	80	83	87	91	94	102	109	116	123
Earthmoving																	
50 km/h	kg																
31 mph	lbs																
Loader																	
10 km/h	kg		19500	20600	21200	22400	23000	23600	25000	25750	26500	27250	28000	30000	31500	32500	
6 mph	lbs		43000	45500	46800	49400	50800	52100	55200	56800	58500	60100	61800	66200	69500	71700	
Underground Transport																	
40 km/h	kg																
25 mph	lbs																

*For further Speed Load Combinations please contact your local Continental sales representative.

Notes

Reference load 28000 kg at 800 kPa used for measurement of static loaded radius and width

Tire load capacity applicable for cyclic service only.

Please always assure that rims/wheels are appropriate for the intended service (inflation pressure, speed, load).

The content of this datasheet is subject to change without further notice.