


DumperMaster

35/65 R 33

Tread	E4
Star Rating	**** / ****
Load / Speed Index	225 A8
Application 1	Underground Haulage

Rim*	28.00x33/3.5
Tire type	TL
O-Ring	OR 333T
Art. No.	1296036000
ContiPressureCheck sensor pre-mounted.	

*Recommended rim in bold

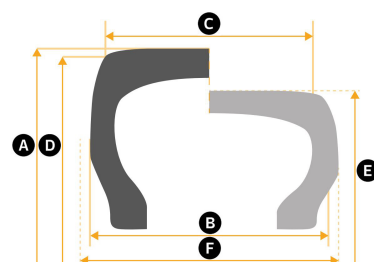

Tire dimensions

Continental Values										
A	Overall diameter	2056 mm	80.9 in	E	Static loaded radius*	913 mm	35.9 in	Weight (approximate)	[kg]	937
B	Overall width	877 mm	34.5 in	F	Static loaded width*	966 mm	38.0 in	Weight (approximate)	[lbs]	2066
C	Tread width	804 mm	31.7 in		Rolling circumference*			Fill volume	[dm³]	
D	Tread edge diameter	2001 mm	78.8 in		TKPH / TMPH	250	171	Max distance per hour	[km]	
	Tread depth	60.0 mm	76/32nd		Minimum dual spacing			Max distance per hour	[mile]	

*at reference load

Tire load capacity

		Tire load capacity per tire at different cold inflation pressures															
		bar	4,00	4,25	4,50	4,75	5,00	5,25	5,50	5,75	6,00	6,25	6,50	7,00	7,50	8,00	8,50
Application and Speed		psi	58	62	65	69	73	76	80	83	87	91	94	102	109	116	123
Earthmoving																	
50 km/h	kg		14000	15000	15500	16000	17000	17500									
31 mph	lbs		30900	33100	34200	35300	37500	38600									
Loader																	
10 km/h	kg		19500	20600	21200	22400	23000	23600	25000	25750	26500	27250	28000				
6 mph	lbs		43000	45500	46800	49400	50800	52100	55200	56800	58500	60100	61800				
Underground Transport																	
40 km/h	kg						20000	21200	21800	22400	23000	23600	24300	25750	27250	29000	
25 mph	lbs						44100	46800	48100	49400	50800	52100	53600	56800	60100	64000	

*For further Speed Load Combinations please contact your local Continental sales representative.

Notes

Reference load 29000 kg at 800 kPa used for measurement of static loaded radius and width.

Tire load capacity applicable for cyclic service only.

Please always assure that rims/wheels are appropriate for the intended service (inflation pressure, speed, load).

The content of this datasheet is subject to change without further notice.