




H89 PLUS

PREMIUM FUEL EFFICIENT
LONG HAUL - STEER - ALL POSITION

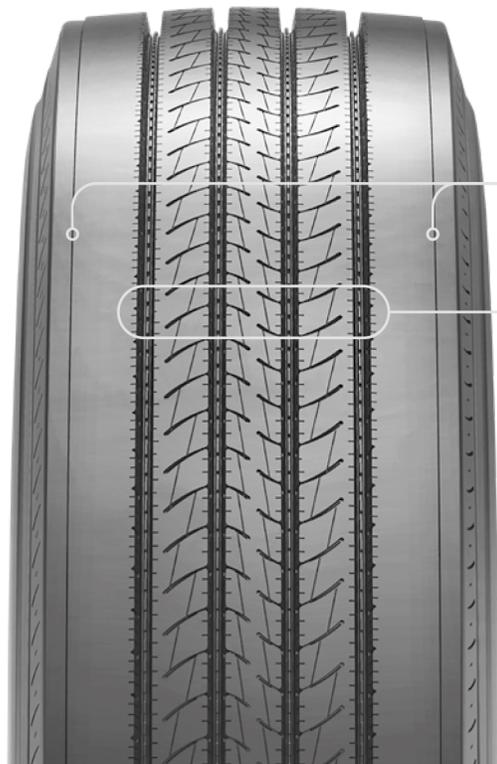

- ENHANCED STEERING PRECISION AND EXCELLENT PERFORMANCE IN EVERY WEATHER CONDITION**
Proprietary SATT Technology and improved compound formulation deliver superior handling and vehicle control at all times.
- NEW DECOUPLING GROOVE**
 A new decoupling groove design protects the footprint from lateral efforts to ensure even wear.
- HIGH MILEAGE PERFORMANCE AND EVEN WEAR**
 New tread pattern with siped ribs and widened tread profile provide an optimized footprint, resulting in even wear and **long tread life**.
- FUEL EFFICIENCY AND DURABILITY**
 New tread and base compounds deliver long tread life minimizing heat generation, ensuring excellent retreadability while complying with **EPA SmartWay®** verified fuel efficiency requirements.



TIRE SIZE	PRODUCT NUMBER	INTERNATIONAL LOAD INDEX SPEED CODE	LOAD RANGE PLY RATING	LOADED RADIUS in. (mm)	OVERALL DIAMETER in. (mm)	OVERALL WIDTH in. (mm)	APPROVED RIMS in. (mm)	MINIMUM DUAL SPACING in. (mm)	REVS PER MILE rpm (rpk)	TREAD DEPTH 32nds (mm)	MAX SPEED mph (kph)*	MAX TIRE LOAD		SMARTWAY
												SINGLE lbs. psi (kg kPa)	DUAL lbs. psi (kg kPa)	
295/75R22.5	3755900	144/141 L	G/14	18.6	40.0	11.4	<u>8.25</u> , 9.00	13.2	519	18/32	75	6175/110	5675/110	✓
				(473)	(1017)	(290)		(335)	(324)	(14.3)	(120)	(2800/760)	(2575/760)	
295/75R22.5	3755800	149/146 L	H/16	18.5	40.0	11.4	<u>8.25</u> , 9.00	13.2	519	18/32	75	7160/123	6610/123	✓
				(472)	(1017)	(290)		(335)	(324)	(14.3)	(120)	(3250/850)	(3000/850)	
11R22.5	3756100	146/143 L	H/16	19.3	41.3	11.6	<u>8.25</u> , 7.50	12.5	504	18/32	75	6610/120	6005/120	✓
				(471)	(1048)	(294)		(318)	(313)	(14.3)	(120)	(3000/830)	(2725/830)	

Note: Rim underlined is measuring rim
(*) Exceeding the lawful speed limit is neither recommended nor endorsed.